



A000608476

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/26/2014 9:18:23 AM

AS DOC #: A000608476

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep TX#: 120142

Page 1 of 2  
A000608476

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Stollie*

Date: 12-16-14 License No: 41002

Northeast Corner of Section 8, Township 140 N, Range 25 W, 5<sup>th</sup> P.M.

On 5-12-14 found a 1/2" iron pipe, 0' above ground


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

Corner Index: E-9

Not to Scale

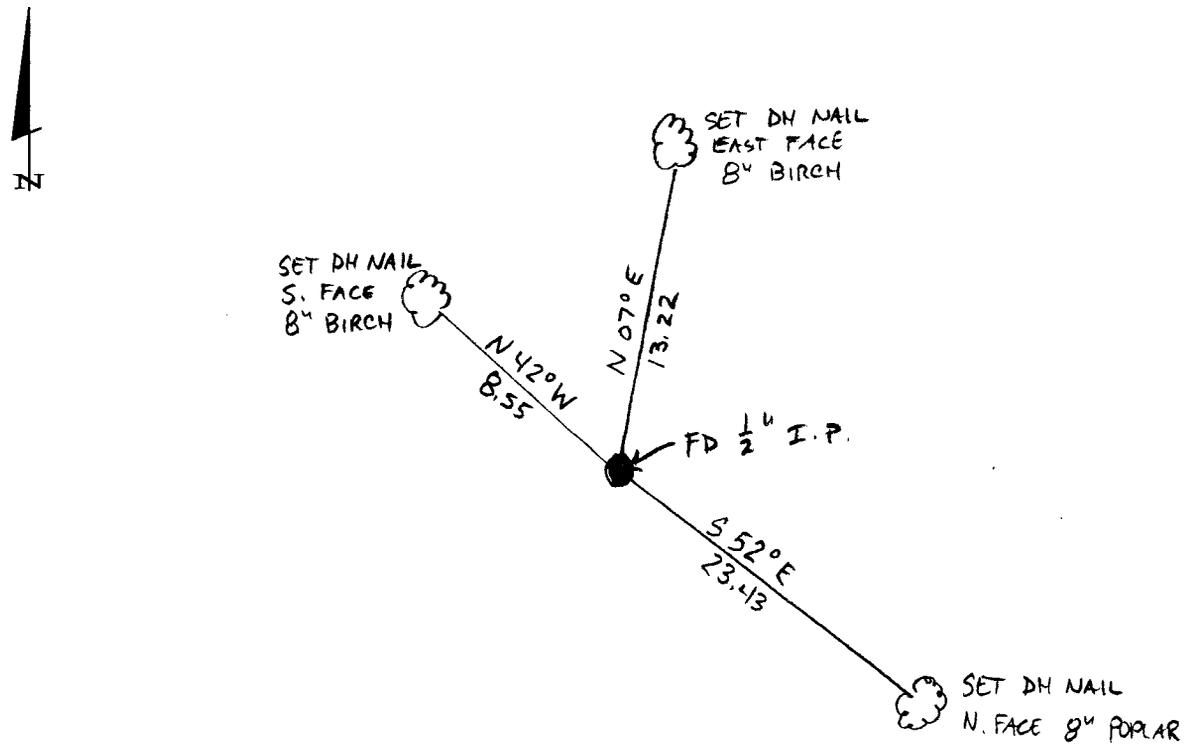

Statement of evidence for this corner position is on the back of this page



**Statement of Evidence**

**Northeast corner, Section 8, Township 140 North, Range 25  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1867 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

5" Bl. Oak	N 71° E	25 links
10" Aspen	S 64 ° E	35 links
7" Aspen	S 23 ½ ° W	20 links
10" W. Pine	N 47 ° W	23 links

1912 – Harry S. Todd in County Survey Record Book A, pages 552-555, found all original bearing trees and set a wood stake. Also found in Curo Book 98, p. 74.

1914 – Guy Todd in County Survey Record Book B, pages 407-412, and in Curo Book 98, p. 82, found Todd's stake down, the W. Pine bearing tree standing and all other original bearing trees down. Set maple stake at corner and established the following witnesses:

5" Balsam	N 30° E	38.60 feet
10" Maple	S 30° W	30.00 feet
7" Maple	S 34° E	34.40 feet
5" Maple	N 24° W	32.90 feet

1937 – CCC- Washburn Lake field book 1, page 44 indicates A 4" Aspen post as an approximate corner was set at distance of 80 chains from section corner to east.

2014 – Patrick Trottier, PLS 41002, found a ½ " iron pipe. No origin of record was found for this pipe. Position fits well with other prior surveys in area. Accepted pipe as corner and established witnesses as shown on the face of this survey.

County Coordinates (Cass County North)

Northing 158013.28  
Easting 589209.57