



A000627553

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

12/29/2016 12:56:31 PM

AS DOC #: A000627553

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR _____ Dep TX#: 135698

Index No. C.O-5.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 6, Township 137 N., Range 30 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-19-16 found A Capped 1/2 inch (inside diameter) Iron Pipe
RLS#43932
- left monument as found, lowered monument, removed monument (explain)
- On _____ DATE _____

SKETCH OF REFERENCE TIES NOT TO SCALE

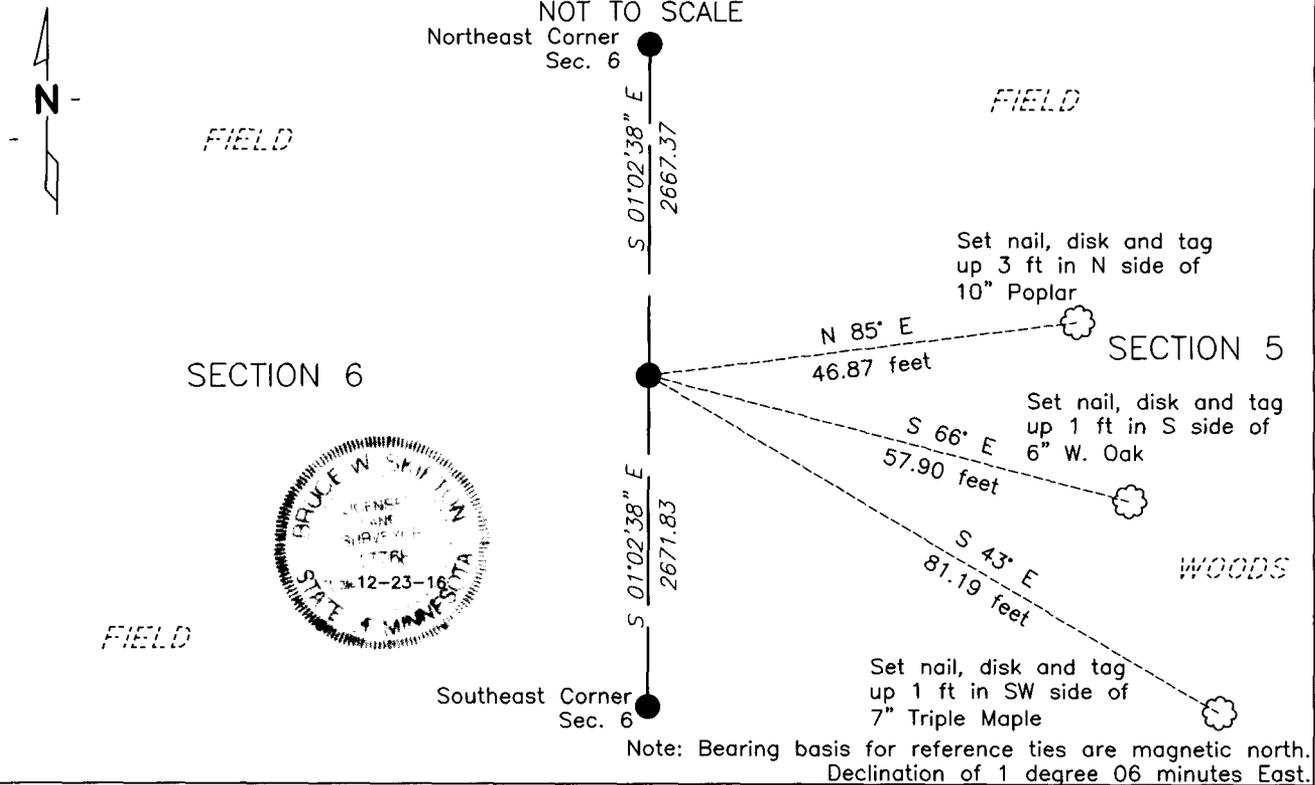

NAD83 (1996 ADJUSTMENT)
 CASS COUNTY SOUTH DATUM

N= 302347.652
 E= 487988.280

Statement of evidence relative to
 this corner is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton
 BRUCE W. SKIPTON

12-23-16
 DATE

Registration No. 17768

- Land surveyor,
- County Surveyor,



Index No. C.0-5.0

Statement of Evidence:

East Quarter corner Section 6, Township 137 North, Range 30 West, 5th Principal Meridian.

October 1870 Richard Cronk, General Land Office (GLO) Deputy Surveyor, notes for the subdivision of Township 137 North, Range 30 West, set a post for the original corner and referenced it as follows:

9" White Birch	N 10 degrees W	28 links (18.5 feet)
8" White Birch	N 70 degrees E	17 links (11.2 feet)

The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyors Office (CCHD/SO).

December 1898 James M. Canfield, County Surveyor, Road Calendar A, page 81, on file at the CCHD/SO, survey of Bungo Road in Township 136 and 137. Canfield measures across the east-west quarter line of Section 6, a distance of 320 rods and 9 links. No corner is indicated as found at the east quarter corner. Certificate of Survey 5850 on file at the CCHD/SO shows the same road. This also appears in Road Calendar B on page 32.

June 2009 Chris Hogleund. LS 43932 set a 1/2" pipe capped RLS 43932 at single proportionate measurement between the northeast corner of Section 6 and the southeast corner of Section 6. An unrecorded Certificate of Location of Government Corner was found in CCHD/SO file 2008.061

8" Poplar	N 83 degrees E	36.16 feet
6" Poplar	S 50 degrees E	43.64 feet
NE of 6	N1°02'42"W	2667.10 feet
SE of 6	N1°02'42"W	2672.45 feet

October 2016 Bolton & Menk's field crew found a 1/2" pipe capped RLS 43932 at this location for this corner. The above monument found at this corner fits the Lost Position using the proportionate measurement between the northeast corner of Section 6 and the southeast corner of Section 6. After further analysis of the recovered record data, field evidence and survey measurements, the found 1/2" pipe capped RLS 43932 is accepted as the location for this USPLSS corner. Reference ties established for the position are shown on the face of this document (Page 1 of 2).