

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 15, Township 144, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3/16/81 found a GLO brass cap monument as set in 1930.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

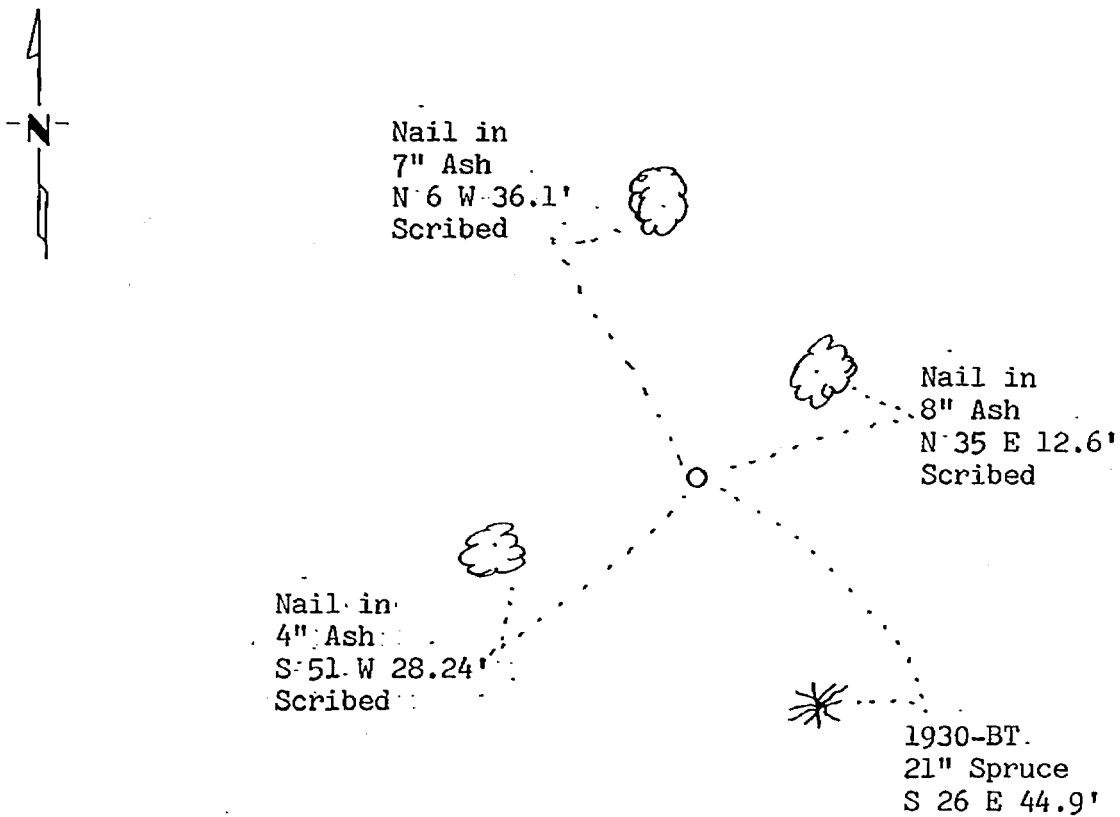

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-11-82  
SIGNATURE DATE

Registration No. 12084

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

264952  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:05 A.M. on the 14 day of Sept. A.D., 1982

County Recorder Beulah Henderson

By MS, Deputy

DOCUMENT NO. 264952

Statement of Evidence:

- 1875 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 8" W. Pine N 42 E 27 links, 8" Aspen N 60 W 40 links, 5" Maple S 30 E 30 links, and 9" Balsam S 58 W 16 links.
- 1930 U.S. General Land Office dependent resurvey reestablished this corner by proportionate distance. No evidence was found of the original corner or bearing trees. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" Poplar N 15½ E 18 links, 10" Spruce S 26¼ E 68 links, 6" Poplar S 65½ W 11 links, and 8" Poplar N 70½ W 44 links.
- 1934 U.S. Forest Service records show the following: CCC records show brass cap monument and four bearing trees found.
- 1968 & 1975 U.S. Forest Service records show the following: U.S. Forest Service technicians found the brass cap in place and evidence of the 1930 bearing trees.
- 1981 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 18". The following bearing trees were found: 18" Balm of Gilead (not Poplar) N 16 E 11.9' now 5' high, 22" Spruce S 26 E 44.9', rotted Poplar stump S 66 W 7.3', and 16" Poplar stub N 71 W 29.0'. Three new bearing trees were marked and are shown on this certificate.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1930 by the GLO resurvey based on bearing tree evidence.