


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 19, Township 139N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a Nothing
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/7/82 placed a Minnesota Department of Transportation Cast Iron
DATE
Monument bolted to the top of 2-7' channel posts (up 2')

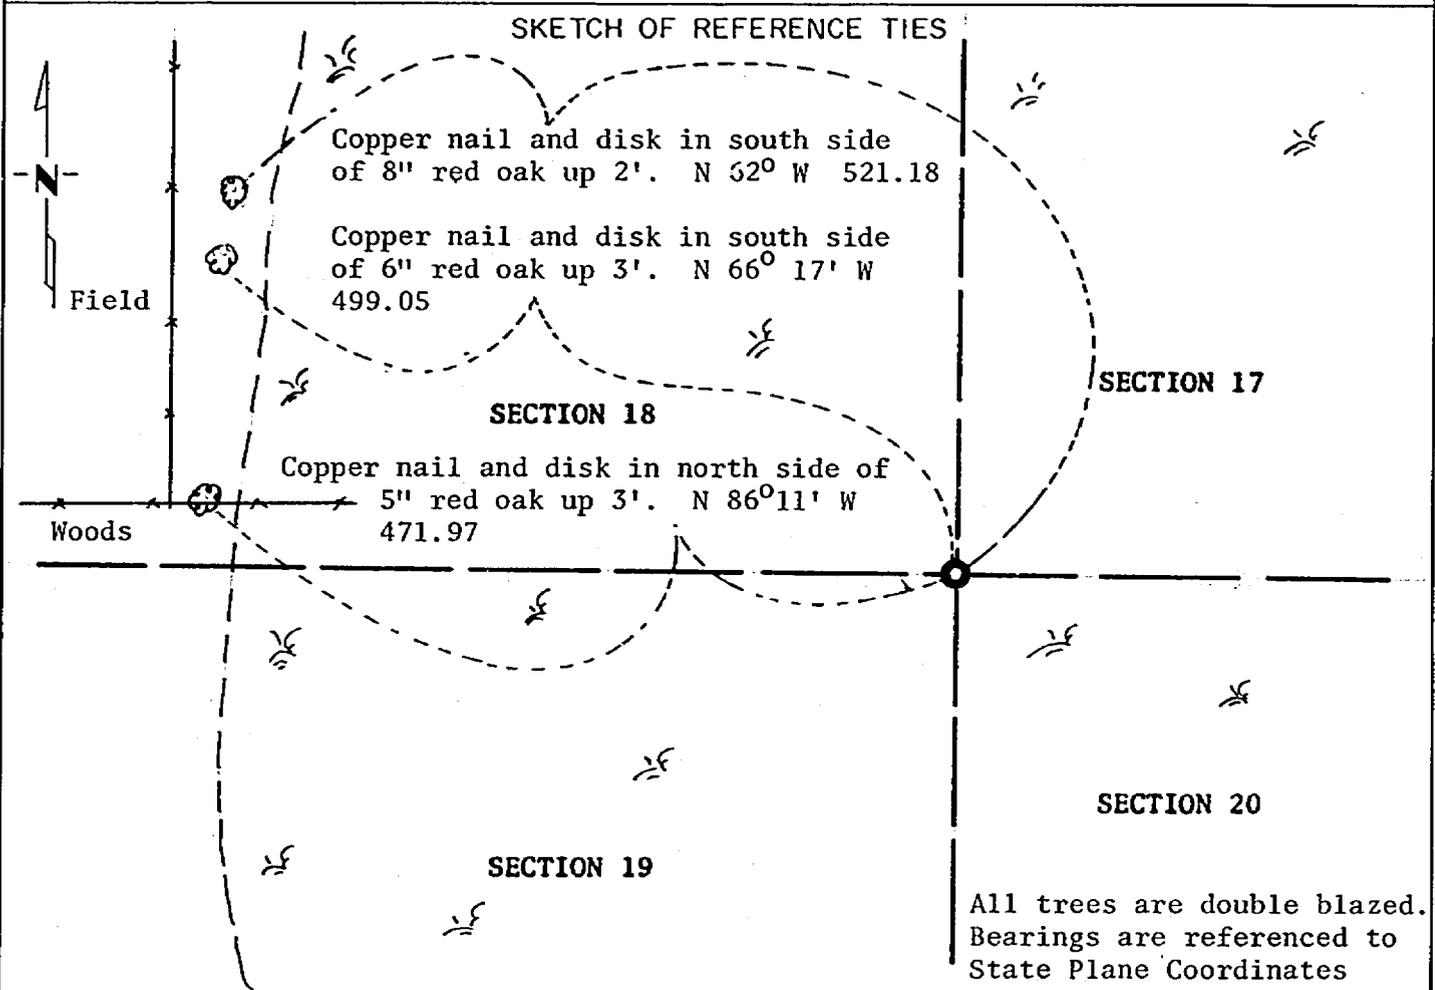

Statement of evidence relative to this corner location is on back of page.

267950

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 3/4/83
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:10 P.M. on the 4 day of April A.D., 1983

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 267950

Statement of Evidence:

Northeast Corner Section 19, Township 139 North, Range 30 West, 5th Principal Meridian.

The Original Public Land Survey was run in 1865 and a wood post was set to mark the corner.

In 1928, the Minnesota Highway Department found a wood post at the corner location in the swamp. The Minnesota Highway Department tied the post to the highway alignment.

We could not find any other survey information relating to the corner location.

By reconstructing the 1928 survey information, we computed the location of the post. The post location is 1.31 feet west and 3.07 feet south of a lost position.

The Minnesota Department of Transportation accepts the computed position of the 1928 post as the correct location for the corner.

For details and survey analysis, contact the Minnesota Department of Transportation Surveys Office in Brainerd, Minnesota.