

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WITNESS FOR
SOUTH 1/16TH (NORTH) Corner of Section 16&17, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/8/80 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

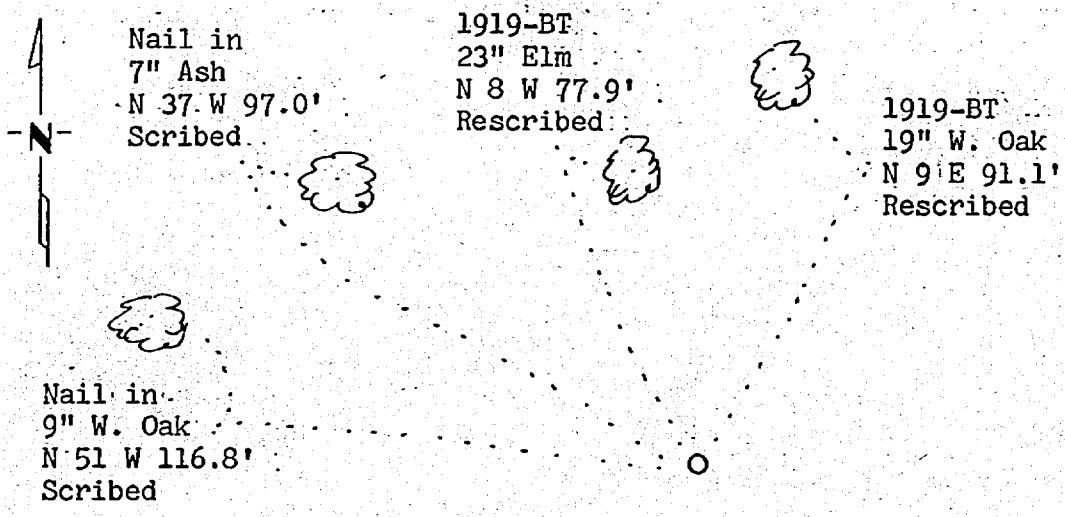

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Nancy H. Stinson 9-14-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

279 272
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:54 P.M. on the 5 day of Dec. A.D., 19 84

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 279 272

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees weremarked: 16" R. Oak N 9 E 138 links and 20" Elm N 8 W 118 links. Notes show this corner falls in the Boy River and a witness corner set 1.92 chains north of the true position on the section line. (note: another witness corner was set to the west on the South 1/16th line of Sec. 17.)
- 1980 U.S. Forest Service technician J. Schoonover found the corner monumented with a GLO brass cap monument in good condition up 10". The following bearing trees were found: 19" W. Oak (instead of R. Oak) N 9 E 91.1' and 23" Elm N 8 W 77.9'. Two new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.