

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 3, Township 140N., Range 30W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 3/31/87 found a 2" x 60" galvanized iron pipe with stamped bronze tablet and 1 1/2" iron pipe along side
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

NOT TO SCALE

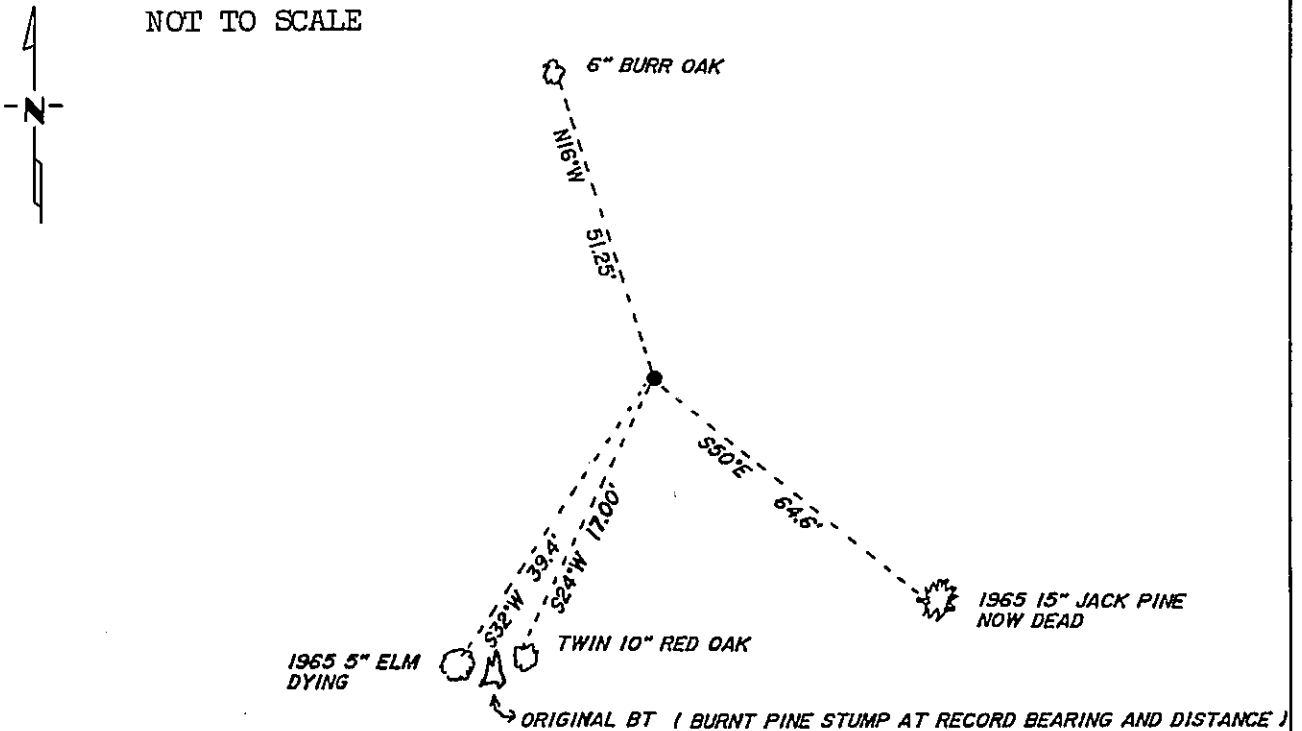

Bearings assumed using 5 degree declination.
Distances to new trees are to nail in side of tree.

Statement of evidence relative to this corner location is on back of page. 317851

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Larson 1-12-96
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:00 P.M. on the 12 day of January A.D. 19 90

County Recorder Chaudine Kayler
By ms, Deputy

DOCUMENT NO. 317851

Statement of Evidence:

A-17

Northeast Corner, Section 3, T.140N., R.30W., 5th P.M.
(Closing Corner)

1865

U.S. General Land Office survey set a wood post for this corner (Closing Corner) and marked the following bearing trees: 20" Norway Pine S31W 39 lks., 11" Norway Pine S21E 54 lks.

1965

U.S. Forrestry Service Surveyor William Okerman found remains of the original survey and a more recent survey marked with a 1½" iron pipe. Both B.T.'s are burnt stumps. Set a 2"x 5' galvanized iron pipe filled with concrete topped with 3" bronze tablet. Marked two new bearings: 15" Jack Pine S50E 64.6' and 5" Elm S32W 39.4'. Both of these were scribed. Steel sign post 7.5' west with USFS signs. Filed affidavit as to the location of government corner.

1987

On March 31, Survey Technician Terry Freeman and Forrester Larry Olson found both iron pipes and the 1965 trees. Marked two new B.T.'s as the Jack Pine is dead and the Elm is dying. The new B.T.'s are: Twin 10" Red Oak S24W 17.0' and 6" Burr Oak N16W 51.25'. This certificate is an update of the 1965 certificate.