

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 8, Township 133 N., Range 29 W., 5th P.M.

State of Minnesota, County of Cass

At the corner location shown on the sketch:


On 27 June 2001 found a 2 inch outside diameter pinched iron pipe, down 0.3 foot,
4 feet± west and 18 feet± north of centerline point of intersection.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

Page 1 of 2 A000594822

SKETCH OF REFERENCE TIES
NOT TO SCALE

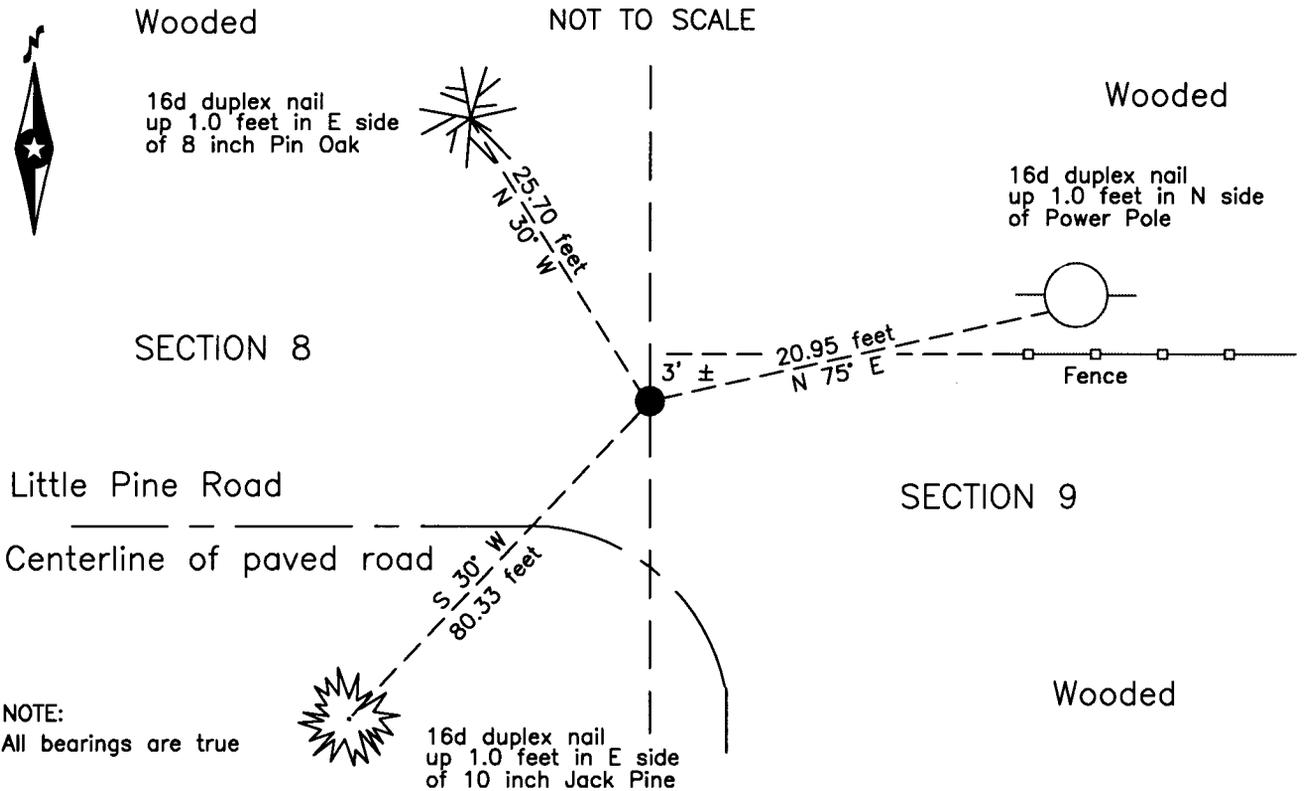

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman
 Terry L. Freeman, Cass County Surveyor
 Date 7/24/13 MN License No. 21367



A000594822
 OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

7/25/2013 3:07:37 PM

AS DOC #: **A000594822**
 PAGES: **2**
 REC FEES: **0.00**

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep



Index No. 13329G.0-09.0

Statement of Evidence

East Quarter corner Section 8, Township 133 North, Range 29 West, 5th Principal Meridian.

- Oct. 1870 Walker, Allen & Putnam, General Land Office (GLO) Deputy Surveyors in the subdivision of this township set a post for the original corner which was referenced as follows:
14" Black Pine West 12 lks (7.92 feet) 5" Black Pine N 15° E 44 lks (29.04 feet)
Said records are on file with the Secretary of State, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- April 1886 Q.A.Averill, surveyor, plat of **GULL RIVER** in the Southeast Quarter of Section 8, recorded with the Crow Wing County Register of Deeds in **Book A of Town Plats** and later with the Cass County Recorders Office (CCRO) as **Plat 16**. Said plat was dependent on the subject corner and has been vacated.
- July 1915 P.Boese under J.Curo, LS 1428, County Surveyor, County Record Book of Survey B, No.325, page 430, and Curo Book 100, page 82, on file in the CCSO, survey for Township Roads, states "I run N on random line 2651.4 feet at this point I find an old ¼ post between secs 8 & 9.....I find stump 14 inch west, stump is burned but there are still marks for old U.S. scribes. The black pine 5" (N) 15° E is destroyed; there is however an old tree that checks for course and distance but it is blown down and decayed. I re-establish the old post and drive an iron spike 3 feet long for ¼ corner".
- May 1918 E.B.Horst, RLS 376, acting County Surveyor, County Record Book of Survey C, No.400, page 127 and Curo Book 153, page 23, survey for a township road, on file in the CCSO, states "we walk S. to an iron monument ½" x 18" bolt at ¼ corner set by P.R.Boese from US BT's and chain N.". The graphic on page 126 indicates a 2" x 48" I.M. at the corner.
- 1925 Minnesota Power & Light Co., Sylvan – Pillager H.E Development, Land and Flowage Survey, on file in the CCSO, by symbol indicates the subject corner to be existing.
- June 2001 B.Hippen, CCSO technician, notes on file in the CCSO, found a 2" outside diameter iron pipe with the top pinched shut, down 0.3 feet, 4 feet, more or less, west of centerline of Little Pine Road to south and 18 feet, more or less, north of centerline of Little Pine Road to west, 3 feet, more or less, south of fence line east and witnessed as follows:
8" Pin Oak N 30° W 25.70 feet 10" J. Pine S 30° W 80.33 feet
Power Pole N 75° E 20.95 feet
- Sept. 2003 J.Kramer, LS 23668, Certificate of Survey, on file in the Kramer Leas Deleo Office and a copy on file in the CCSO, indicates a monument found.
- April 2004 B.Grivna, LS 17253, Certificate of Survey for Property Etc. Inc. a copy on file in the CCSO, indicates a monument found.
- May 2004 J.Kramer, LS 23668, Certificate of Survey, Project No. WERMT04.001, on file in the Kramer Leas Deleo Office and a copy on file in the CCSO, indicates a monument found.
- June 2006 B.Hippen, CCSO technician, notes on file in the CCSO, measured 2652.50 feet from this monument south to the monument recovered in 2001 at the Southeast corner of Section 8.
- July 2013 B.Hippen, CCSO technician, records of the CCSO, found the monument and witnesses from 2006. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the position recovered and witnessed by the CCSO in 2001 agrees with the 1915-1918 County Surveyor recovery and is a correct perpetuation of this corner.